

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**



INVESTOR IN PEOPLE

DOCKET 81444/F-P

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

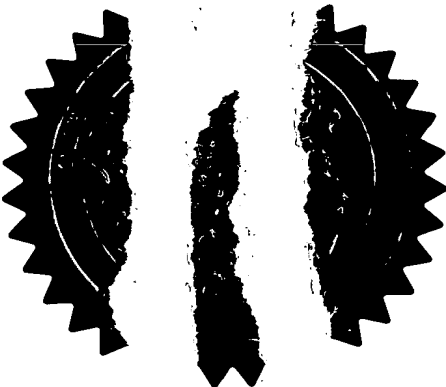

Signed

Dated

15 May 2001

Patents Act 1977
(Rule 16)

The
Patent
Office

21DEC00 E593271-2 D00117
P01/7700 0.00-031178.7

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
21 DEC 2000
RECEIVED

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference **81444/11621/03** **21 DEC 2000**

2. Patent application number **0031178.7**
(The Patent office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)
EASTMAN KODAK COMPANY
343 STATE STREET
ROCHESTER
NEW YORK 14650-2201
UNITED STATES OF AMERICA

423020001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

NEW JERSEY

4. Title of the invention **PHOTOPROCESSING METHOD AND APPARATUS**

5. Name of your agent (if you have one) **B BARKER**

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
KODAK LIMITED
PATENTS DEPARTMENT (W92-3A)
HEADSTONE DRIVE
HARROW
MIDDLESEX HA1 4TY

7498678001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of Filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description 9

Claim(s) 3

Abstract 1

Drawing(s) 8 ⁷⁶

3

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patent Form 9/77*)

Request for substantive examination (*Patent Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature *B Barker*

Date *2/12/00*

12. Name and daytime telephone number of person to contact in the United Kingdom **B BARKER** **020 8424 5177**

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

Photoprocessing Method and Apparatus

Field of the Invention

This invention relates to the photo-processing industry. In particular it
5 relates to the delivery of processing solutions to a processor.

Background of the Invention

Containers in the form of cartridges are used to supply ready to use
processing solutions to photographic processing apparatus. These containers are
10 designed to be easily and quickly coupled to the apparatus. With respect to both
kiosk and highly dispersed processing it is of interest to be able to supply the
customer with easily replaceable chemical concentrate cartridges that are
apparently dry, i.e. there is no contact with the solution itself. It is also desirable
to be able to deliver the concentrates accurately from the said cartridges into the
15 processing apparatus. This invention combines these two criteria to provide a
method that achieves both requirements in a robust cost-effective way.

Commonly mastics and sealant are available from DIY stores packaged in
a large syringe type canister. Normally the syringe end is cut and the piston
depressed with a "gun" to squeeze the sealant from the syringe. The contents of
20 the syringe are normally of high viscosity, being paste or gel or Acrylic based.
For example, Alpha Metals, a manufacturer, packs "FernoX"™, a central heating
corrosion inhibitor gel into similar containers. They use a metal foil to seal the
plunger end. As the packaging is made from high-density polyethylene and the
plunger from low-density polyethylene the cartridge is easily recycled when
25 empty.

Problem to be solved by the Invention

It is an aim of the invention to provide a low cost accurate method of
delivering processing chemistry to the customer and into the machine. It is an aim
30 to provide a syringe delivery system for low viscosity fluids in which there is
substantially no leakage and in which the containers for the processing solutions
are recyclable. It has been have found by experimentation that the same container

as described above can hold a low viscosity liquid without spillage even when the plunger is activated. This is due to the integrity of the seal and the hydrophobicity of the plastic material.

5 **Summary of the Invention**

According to the present invention there is provided a method of delivering processing solution to a processing apparatus wherein the solution is supplied in a storage container, the container forming part of a metering system.

The invention further provides a delivery unit for supplying processing
10 solution to a processing apparatus, the unit comprising a storage container having a nozzle at one end thereof and incorporating a piston therein, and means for activating the piston such that a fixed amount of solution is delivered out of the container via the nozzle each time the piston is activated.

It has been found that solution can be delivered with remarkable accuracy
15 by means of a simple, low cost yet effective mechanism described below.

Preferably a plastic seal is provided behind the piston.

Advantageous Effect of the Invention

The invention provides for the solutions used in a photoprocessing
20 apparatus to be housed in an air tight, leak proof, robust, "apparently dry" container. This container is also part of the delivery mechanism. As the container is air-tight there is no solution movement within the container. This is particularly advantageous since the container therefore acts as a solid component during transport, installation and operation. It is not flexible and therefore does not
25 require any external packaging for protection.

The invention avoids the need to supply the processing chemistry in separate containers which then require use of accurate pumping equipment for delivery.

The mechanism of the piston allows highly accurate delivery of the
30 solutions at low cost.

The container size and fill volume can be easily adjusted to suit the solution to be housed. The volumes may be such that all containers empty at one time or at different times.

The containers are fully recyclable.

5 The invention may be used in all processes and at all process stages.

Use of a separate plastic seal ensures a "dry" system.

It would be advantageous to use a plastic seal (as is used over Kodak™ SM™ chemical packaging couplings) to ensure no chemical leak and to aid recycling of the container.

10 A conventional inexpensive "off the shelf" dispensing gun can be used to provide the dispensing apparatus.

The invention is particularly useful for single part chemistry, e.g. Kodak Ektacolor Prime SP™.

15 **Brief Description of the Drawings**

The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic side view of a container suitable for use with the invention;

20 Figures 2 and 3 are schematic views of such a container with alternative ends to the nozzle;

Figure 4 is a schematic side view of a delivery unit in accordance with the invention;

Figure 5 shows the same unit once it has been emptied;

25 Figure 6 is a schematic view showing the operation cycle of the cam;

Figures 7A and 7B illustrate two methods of changing the stroke of the piston within the container;

Figure 8 illustrates a further container suitable for use with the invention;

Figure 9 illustrates a method of activating the piston within the container;

30 and

Figure 10 illustrates a further method of activating the piston within the container.

Detailed Description of the Invention

Figure 1 shows the general arrangement of the photographic chemical delivery and supply container.

5 A cylinder 2 houses the photographic solution 1. The cylinder 2 has a nozzle 4 at one end. This nozzle is sealed with a break off tip 3 at the end thereof. The cylinder 2 is also provided with a movable piston 6. The front end of the piston has a protrusion or shaped member sized to fit into the nozzle 4 of the cylinder 2. A removable or pierceable seal 5 is provided behind the piston 6. The
10 seal 5 is provided in case some photographic solution seeps past the piston 6 during storage before use.

 In storage the container is full of photographic solution 1 and the piston 6 is at the opposite end of the cylinder from the nozzle 4. When the solution is required to be delivered to the processing apparatus the piston 6 is operated to
15 push the solution out of the nozzle 4. Figures 2 and 3 illustrate two alternative ends for the nozzle 4. It will be understood by those skilled in the art that the invention is not limited to the two embodiments illustrated.

 Figure 2 shows a non-return valve 7 fitted to the end of the nozzle 4. This valve 7 will lift to pass solution only when the piston 6 raises the pressure in the
20 cylinder 2 during a solution delivery cycle.

 Figure 3 shows a plug 8 fitted into the end of the nozzle 4.

 In the operation of the embodiment shown in Figure 3 the cylinder 2 full of solution 1 is pushed into the opening 50 of the processing apparatus. This opening includes a conical rubber seal 9 which seals against the nozzle 4 with the
25 aid of a moulded feature 10. A hollow probe 12 then pierces the plug 8 and enters the cylinder 2 where the solution is held. The piston 6 then pushes out the solution through the probe 12.

 Figure 4 shows the cylinder 2 fixed firmly within a cam operated delivery unit 13. The delivery unit has two chambers, one housing the cylinder 2 and the
30 second housing activation means for the piston 6. The chambers are connected via a bore to allow passage of a push rod plunger 15. A front stop plate 14 is located at the front of the delivery unit 13. The front of the cylinder 2 is pushed

up to the front stop plate 14 by means of the push rod plunger 15. The nozzle passes through a corresponding opening in the front wall of the first chamber. A cam-plate 16, located external to the delivery unit 13, has an operating pin 17 attached thereon. The operating pin 17 bears against one end of a lever 19. The
5 other end of the lever 19 bears against a one way clutch plate 20. The clutch plate 20 is movably located on the push rod plunger 15 and is biased by spring 21. The spring is retained between the clutch plate 20 and the front wall of the second chamber.

In use, as the cam-plate 16 rotates the operating pin 17 moves with it. The
10 movement of the pin 17 pushes the operating lever 19 back and forth in the direction of the arrow shown in Figure 4. The lever 19 bears against the clutch plate 20 causing it to tip and grip the push-rod plunger 15. This causes the plunger 15 to advance. As it advances it pushes piston 6 forward and delivers a shot of solution. The cam-plate 16 and pin 17 continue to rotate, releasing the
15 clutch plate 20 from the push-rod where upon spring 21 pushes it back to its starting position.

Since the cam 16 moves a predetermined distance and this in turn moves the piston 6 a fixed amount of solution is delivered at each stroke. The cam is operated by an electric motor, not shown.

20 Figure 5 illustrates how the shape of the piston 6 ensures that all of the solution 1 is delivered.

The front end of the piston 6 has a shaped member or protrusion 22. As explained above, the protrusion 22 is designed to fit exactly into the delivery nozzle 4 so that when the piston has swept the full length of the cylinder 2 the
25 shaped protrusion has also displaced any solution that might remain in the nozzle.

Figure 6 illustrates the motion of the cam-plate pin 17 and lever 19 as it completes one cycle.

The amount of solution dispensed from the cylinder can be very accurately varied and controlled by simply changing the stroke of the clutch and hence the
30 displacement by the piston. Figure 7 shows two method of doing this. Figure 7A illustrates how the stroke is changed by moving the position of the pin 17 on the cam-plate 16. Figure 7B illustrates how the stroke is changed by moving the

whole cam-plate assembly back or forth, as indicated by the arrow, with respect to the lever 19.

As the piston only advances one way no air gets into the container. There is therefore no solution movement within the container once it is packed. It
5 therefore acts as a "solid" component, having the aforementioned advantages.

Another method of actuating the piston would be to use a screw thread mechanism. This is illustrated in Figure 9. A screwthread 30 is attached to the rear of the movable piston 6. The screwthread 30 passes through a threaded central hole in gear 31. Gear 31 is in drive connection with the gear 32. Gear 32
10 is connected via drive shaft 35 to motor 33. The cylinder 2 is supported by support member 34.

When solution is to be dispensed from the cylinder 2 the motor 33 is activated. The motor 33 drives gear 32 which in turn drives gear 31. As the gear 31 has a threaded central hole the screwthread 30 is moved linearly by the
15 movement of the gear 31. The screwthread is not rotated by movement of the gear 31. As the screwthread moves linearly it pushes the piston 6 towards the nozzle of the cylinder, thus dispensing the solution. This mechanism can be continuously variable by altering the number of rotations of the threaded screw. Accurate and variable control of solution delivery is hence obtained.

A further method of actuating the piston is illustrated in Figure 10. In this embodiment a magnet 40 is provided on the piston 6. A pneumatic or hydraulic cylinder 42 is in connection with the rear of the piston 6 via a push rod 45. The cylinder 42 is provided with control means 43. An electromagnetic sensing coil 41 is located adjacent the cylinder 2. Sensing means 44 is in electrical connection
20 with the coil 41.

When solution is to be dispensed from the cylinder 2 the pneumatic or hydraulic cylinder 42 is activated. The piston 6 moves forward, pushing solution out of the nozzle. As the piston moves magnet 40 moves with it. The movement of the magnet 40 cause a change in the electromagnetic field of the sensing coil
30 41. This change is detected by the sensing means 44. When the piston has moved a predetermined distance, and thus dispensed a predetermined volume of solution,

a signal is sent from the sensing means 44 to the control means 43 causing the cylinder to stop moving the piston rod 45.

Although a pneumatic /hydraulic cylinder has been illustrated it will be understood that any linear drive mechanism could be used.

5 In both Figures 9 and 10 the piston 6 is shown without the nozzle shaped front for simplicity.

The above are examples of actuating the piston. It will be understood that any suitable method may be used.

10 In all of the examples described above the sealing membrane 5 has been removed prior to use. In the embodiment shown in figure 8 this membrane 5 can be left in place as the push rod is provided with a spiked cutter 24. The spiked cutter opens a hole in the membrane, pierces the piston and punctures the outlet end of the cylinder before the plunger engages with the piston.

15 Example

In Run 1 a 1 litre cylinder supplied by Fisbach, a manufacturer, was fitted to a delivery gun supplied by Kennet, a manufacturer, which was actuated via a cam to deliver a set movement of the gun's trigger. After each rotation of the cam the mass of water delivered from the cylinder into a container on a balance was
20 measured. After a predetermined number of strokes the mean volume (ml) delivered, the standard deviation, the maximum and the minimum volumes (ml) were calculated. The experiment was repeated in Run 2 with a reduced trigger movement. The data below show the results obtained were quite accurate considering the low cost and complexity of the delivery gun.

25

Run 1

	1	16.27
	2	16.16
	3	16.28
30	4	16.37
	5	16.43
	6	16.45
	7	16.42
	8	16.29
35	9	16.21

	10	16.22
	11	16.24
	12	16.2
	13	16.22
5	14	16.18
	15	16.12
	16	16.19
	17	16.27
	18	16.14
10		
	Mean	16.26
	Standard deviation	0.099
	Max	16.45
	Min	16.12

15		
	Run 2	
	1	5.501
	2	5.466
	3	5.513
20	4	5.492
	5	5.48
	6	5.514
	7	5.414
	8	5.561
25	9	5.49
	10	5.51
	11	5.585
	12	5.509
	13	5.496
30	14	5.546
	15	5.5
	16	5.47
	17	5.61
	18	5.5
35	19	5.6
	20	5.52
	21	5.48
	22	5.51
	23	5.46
40	24	5.46
	25	5.56
	Mean	5.509
	Standard deviation	0.046

Max	5.61
Min	5.414

5 The interface between the processing equipment and the syringe could
either be via moulded threaded part that mates with a corresponding fitting on the
machine or by a system that punctures the moulded seal as the unit is screwed into
a housing.

10 It is possible that the syringes that contain different photochemicals have
different pin registrations, to ensure that the wrong solution is not fitted to the
chemical delivery system. This would be deleterious to the process. Other means
of ensuring that the correct solutions are supplied to the system is to have different
threads or other moulded parts of the containers for different solutions.

15 It is apparent that any photographically useful chemical could be packed in
this way and syringes of various volumes are available. Air is excluded from the
packaging and photochemicals should display good storage. The delivery unit is
apparently dry. As no air is included it will not feel like solution is contained
within.

20 The invention has been described in detail with reference to preferred
embodiments thereof. It will be understood by those skilled in the art that
variations and modifications can be effected within the scope of the invention.

Claims:

1. A method of delivering processing solution to a processing apparatus wherein the solution is supplied in a storage container, the container forming part of a metering system.

5

2. A method as claimed in claim 1 wherein the metering system is a positive displacement system.

3. A method as claimed in claim 2 wherein the displacement is caused by movement of a cam.

10

4. A method as claimed in claim 2 wherein the displacement is caused by a screwthreaded member.

5. A method as claimed in claim 2 wherein the displacement is caused by linear motion delivery.

15

6. A method as claimed in any preceding claim whereby the container has no voids or airspace within, thus ensuring no movement of solution within the container and ensuring accurate delivery throughout operation.

20

7. A method as claimed in any preceding claim wherein the container is punctured as it is fitted onto the processing apparatus.

8. A method as claimed in any of claims 1 to 6 wherein the container is punctured prior to being fitted onto the processing apparatus.

25

9. A method as claimed in any preceding claim wherein the container is fully emptied by the positive displacement system.

30

10. A delivery unit for supplying low viscosity processing solution to a processing apparatus, the unit comprising a storage container having a nozzle at

one end thereof and incorporating a piston therein, and means for activating the piston such that a fixed amount of solution is delivered out of the container via the nozzle each time the piston is activated.

5 11. A delivery unit as claimed in claim 10 wherein a plastic seal is provided behind the piston.

 12. A delivery unit as claimed in claim 10 or 11 wherein a non return valve is fitted to the end of the nozzle.

10

 13. A delivery unit as claimed in any of claims 10 to 12 wherein the front end of the piston is shaped to fit exactly into the nozzle.

 14. A delivery unit as claimed in any of claims 10 to 13 wherein the
15 activation means comprises a rod for pushing the piston, the rod being in connection with a clutch plate activated by a cam.

 15. A delivery unit as claimed in claim 14 wherein the rod is provided with spiked cutting means.

20

 16. A delivery unit as claimed in claim 14 or 15 wherein the amount of solution delivered can be varied by changing the stroke of the clutch and thereby the displacement of the piston.

25 17. A delivery unit as claimed in any of claims 10 to 13 wherein the activation means comprises a screw thread mechanism.

 18. A delivery unit as claimed in claim 17 wherein the amount of
30 solution delivered can be varied by altering the number of rotations on the screw thread.

19. A delivery unit as claimed in any of claims 10 to 18 wherein the unit is provided with identification means to identify the particular solution contained within the container.

5 20. A delivery unit as claimed in any of claims 10 to 19 wherein the container is manufactured from recyclable plastics material.

21. A delivery system for delivering processing solutions to a processing apparatus including a unit as claimed in of claims 10 to 20.

Abstract

Photoprocessing Method and Apparatus

Processing solution is delivered to a processing apparatus by means of a syringe type delivery system.. The container in which the solution is stored acts
5 both as the storage container and as part of the metering system for delivering an accurate volume of solution.

1/8

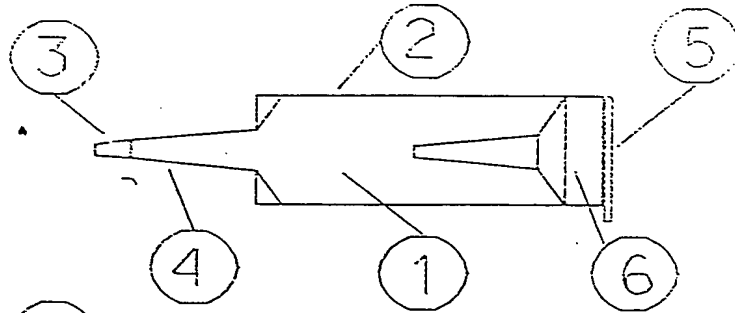


FIG 1

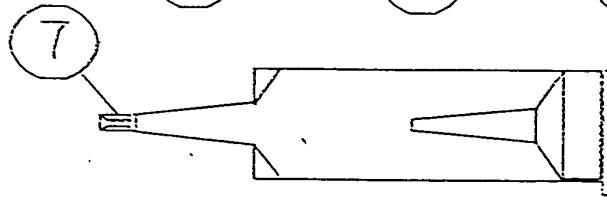


FIG 2


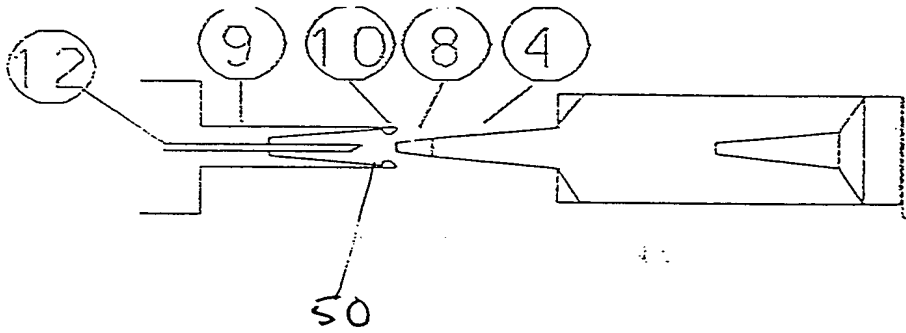


FIG 3

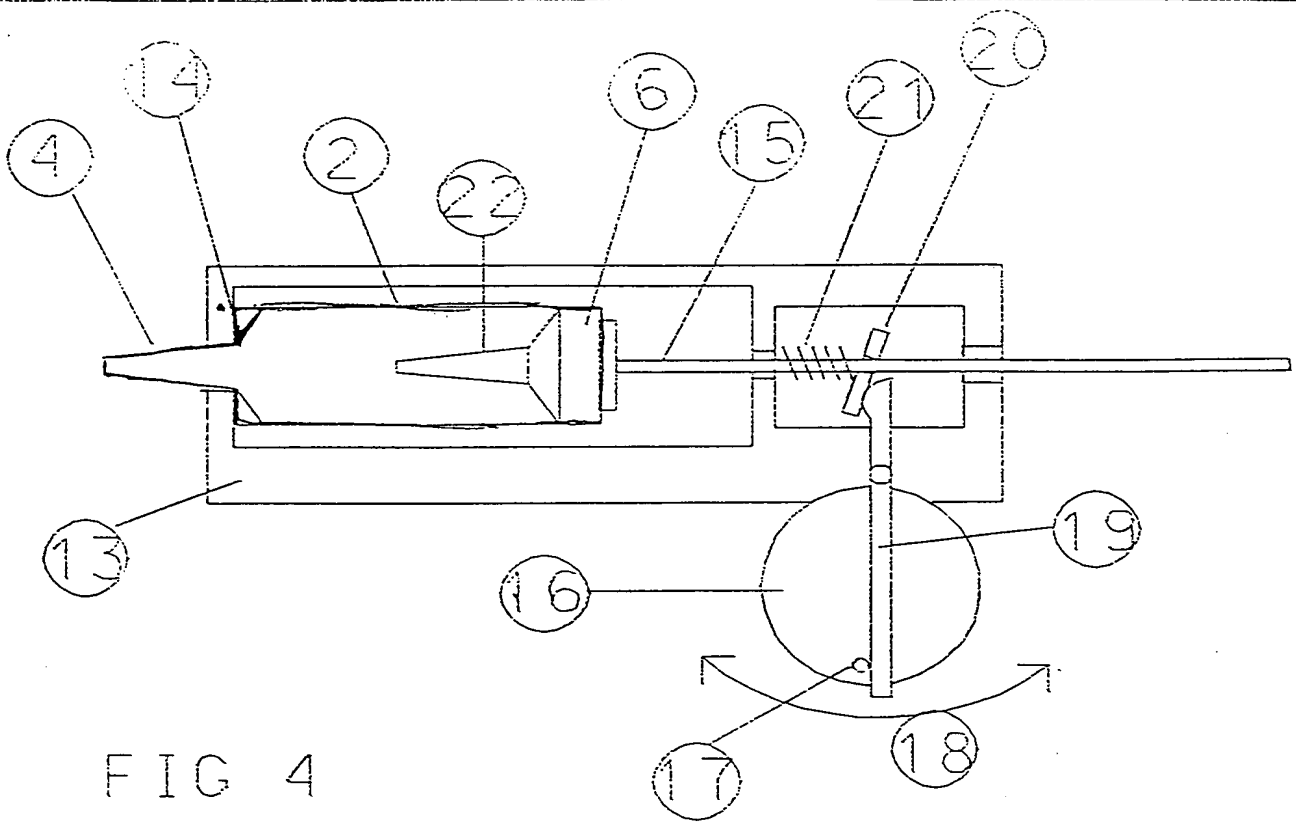

3/8

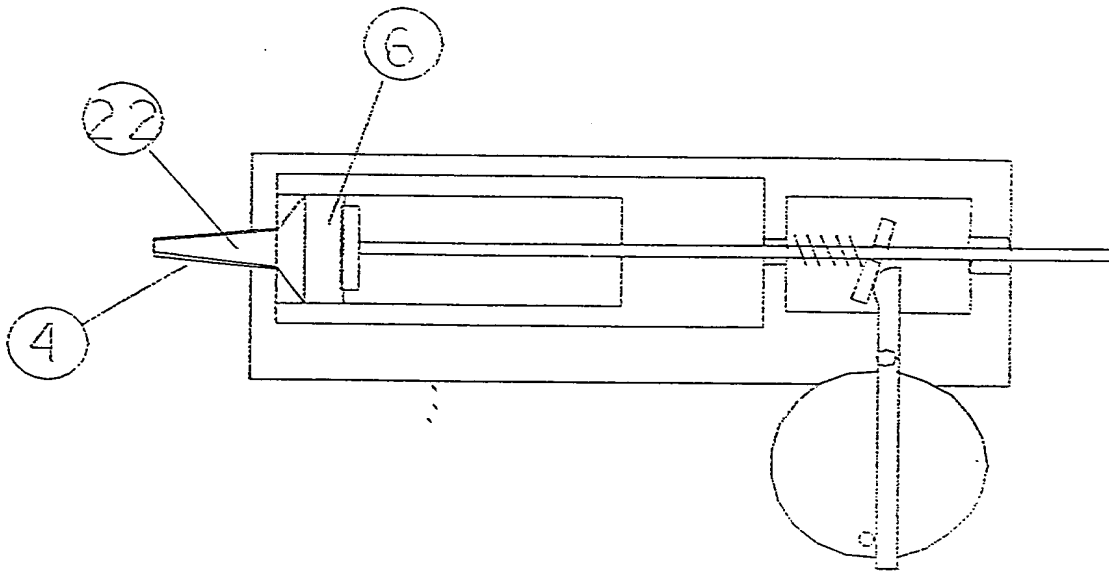


FIG 5

418

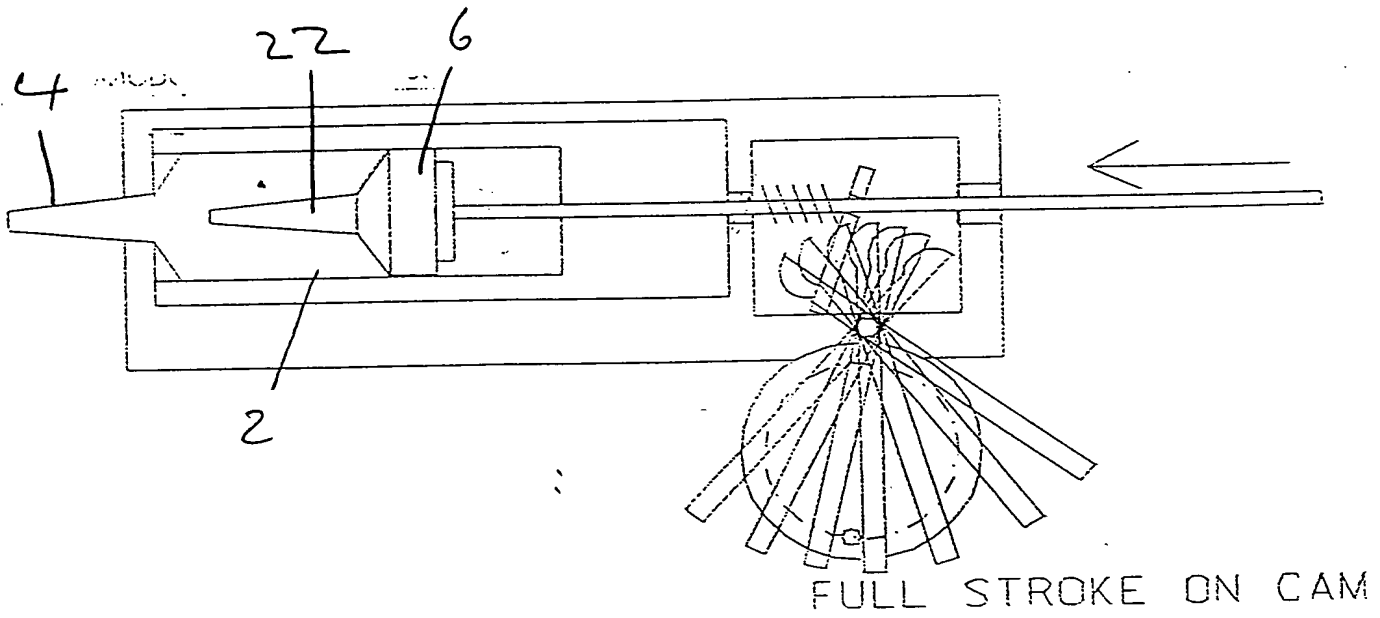


FIG 6

(Continued over)

SIDE A

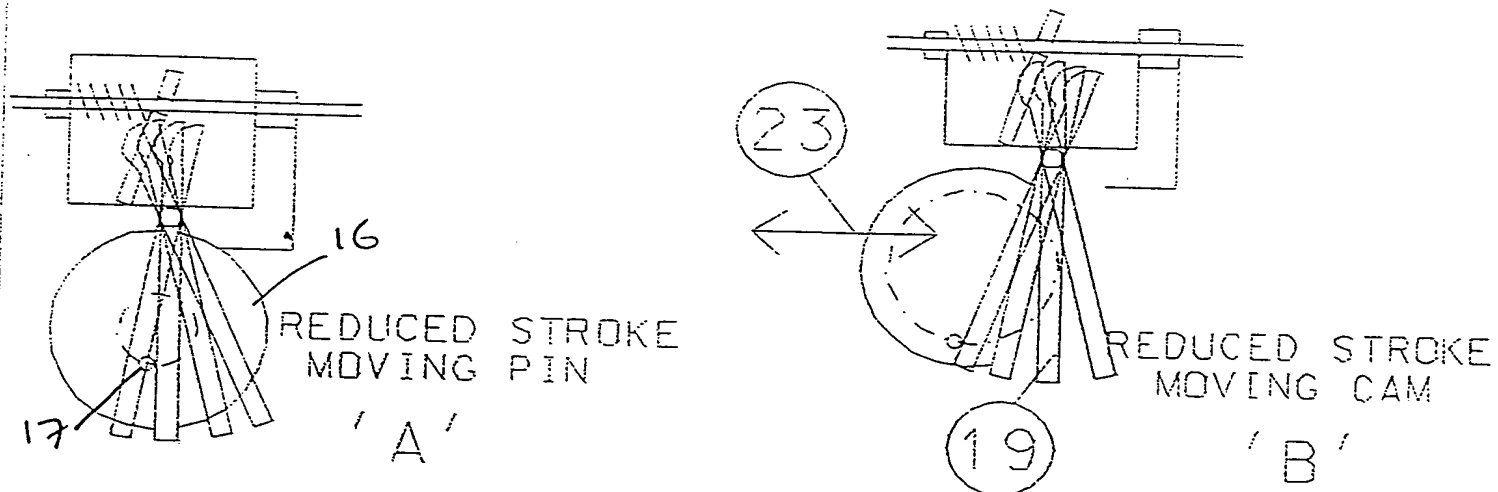


FIG 7

678

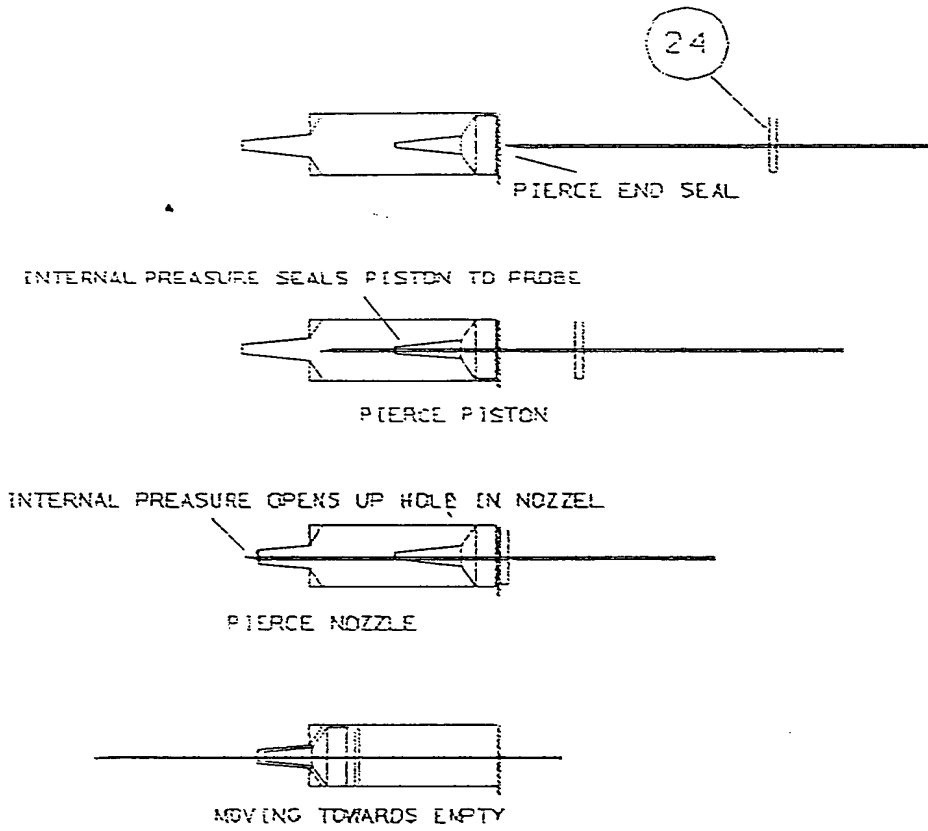


FIG8

8/7/8

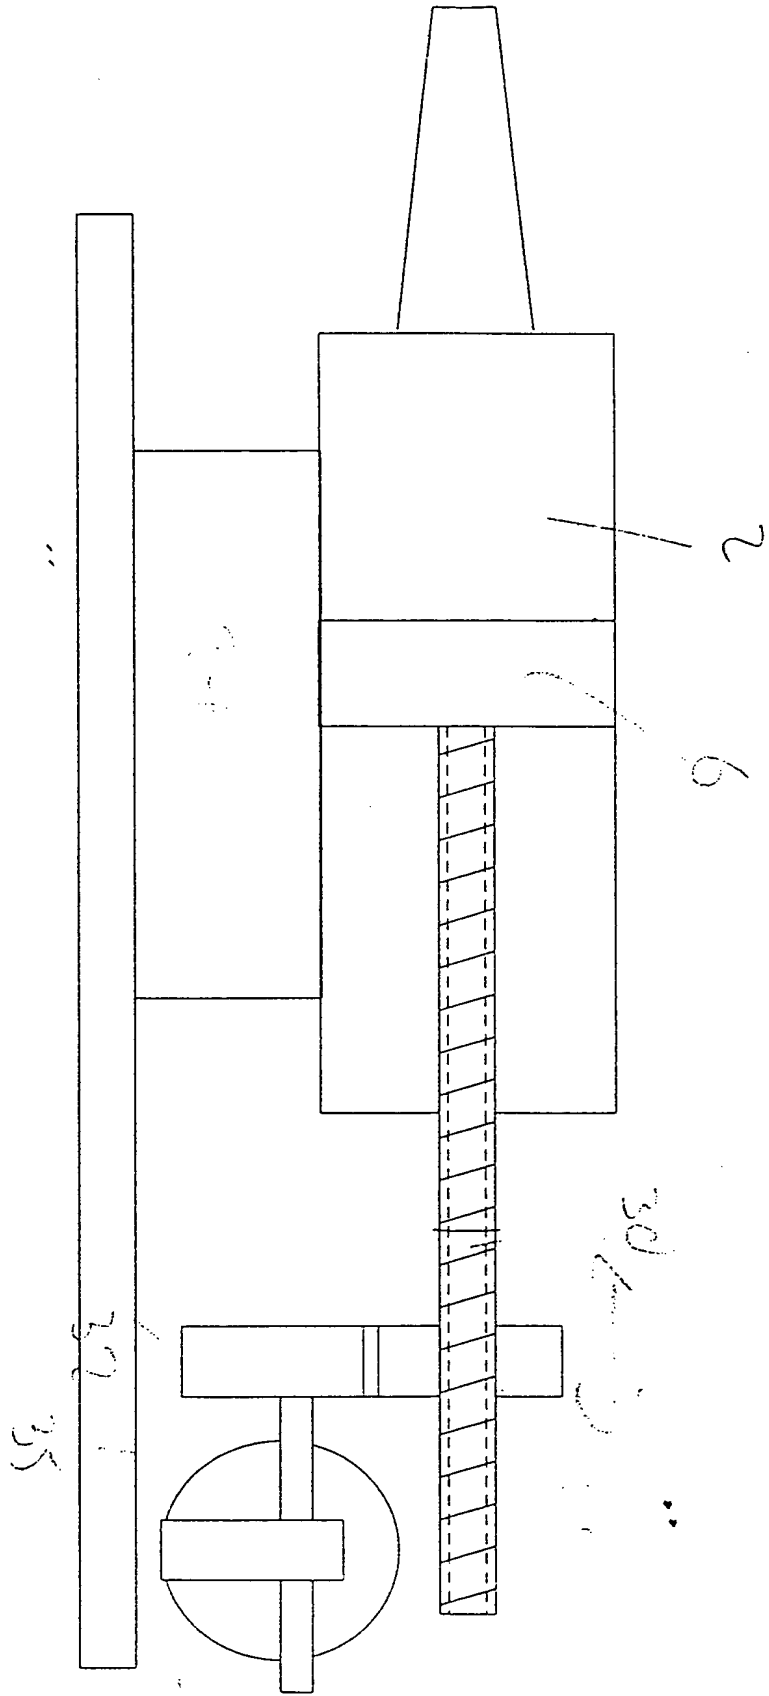


FIG 10

